

2Mega, x20 Zoom IP IR Bullet CAMERA

TCAM-4732MBR




제품특징

- 1/2.8" CMOS Image Sensor
- 지능형 이미지 프리셋 기능
- 최대 줌(Optical x20 / IP x10)
- 최대 30fps@1920x1080
- 트리플 스트리밍 지원(Pri : H.265/H.264, Sec x2 : H.265/H.264/MJPEG)
- 야간 최대 가시거리 80m 지원
- 지능형 영상분석 기능

*IVA : 가상선/영역, 출입 감지, 배회, 방향 감지, 발생/소멸 감지 등

*분석 이벤트 : 디포커스 감지, 움직임 감지, 템퍼링, 오디오 감지

외관도

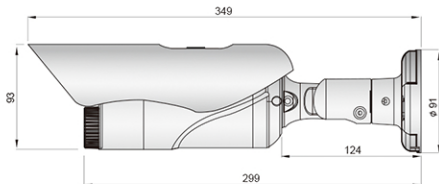

Imaging	Sensor	1/2.8" CMOS Image Sensor
	Zoom	Optical 20x
	Focal length	f = 5.5 ~ 110mm
	Angle of view	Horizontal : 58°(wide) ~ 2.8°(tele), Vertical : 33°(wide) ~ 1.6°(tele)
	Maximum aperture ratio	F1.5 ~ F3.8
	Focus control	Oneshot AF
	Lens type	DC auto iris
	Min illumination	Color : 0.01 Lux (1/30sec, 35IRE), BW : 0 Lux (IR ON)
	Electronic shutter speed	1/1 ~ 1/100,000 sec
	Day & Night	Day / Night / Auto
	Back light compensation	BLC / HLC / WDR
	White balance	Auto tracing white / Auto white / Manual
	Gain control	Auto
	Noise reduction	Auto / Manual
Camera Functions	Image stabilization	Support
	Defog	Support
	Image rotation	Horizontal(Mirror), Vertical(Flip)
	Motion detection	8 regions on 23x15 cells
Video	Privacy masking	8 regions (polygons of 8 points)
	IR LED	8 pieces, Max 80m
	Burn-in OSD	Camera title, direction, user-defined Multi-lingual: (English, Korean, French, German, Spanish, Italian, Russian, Japanese, Swedish, Portuguese, Dutch, Hungarian, Finnish, Special Symbols)
Audio	Compression	H.264 / H.265 / MJPEG
	Frame rate	Max 30fps @ 1920x1080
	Bitrate control	H.264/H.265: CBR / VBR / Hybrid, MJPEG: VBR
	Resolutions	1920x1080 ~ 352x240
Event and Alarm	Streaming	Triple Streaming: Primary : H.264 / H.265, Secondary x 2 : H.264 / H.265 / MJPEG
	Compression	G.711 u-law
	Sampling rate	G.711: 8KHz
	Bitrate	G.711: 64Kbps
Network	Streaming	Full-duplex
	Input & Output	1 x Line-In (mono), 1 x Line-Out (mono)
	Event sources	Video analytics, Audio detection, Client disconnection, Sensor input, User-defined event
	Event actions	E-mail notification, OSD alert, FTP upload, PTZ preset, Alarm control, Recording, HTTP action
Power / Operating Conditions	Interface	Ethernet 10/100 base-T (RJ-45)
	Protocol	IPv4/v6, TCP, UDP, IGMP(Multicast), ICMP, DHCP, HTTP, HTTPS, RTP, RTSP, FTP, SNMP, SMTP, UPnP, WS-Discovery, Zero Configuration, NTP, DDNS, RTMP
	Security	Basic/Digest authentication, HTTPS, IP address filtering, User access log, TTA certification
	Application programming interface	Truen protocol/SDK, ONVIF, PSIA, MPEG-TS
General	Power supply	Min DC 12V/1.5A, PoE(Power over Ethernet) : 802.3af
	Power consumption	DC12V/PoE : Max 18W
	Operating condition	-20°C ~ 70°C / Less than 90% RH
	Storage condition	-50°C ~ 60°C / Less than 95% RH
General	Certifications	IP67, IK10, KC
	External devices	1 x Sensor-In (dry contact, NO/NC) 1 x Alarm-Out (dry contact, NO) 1 x RS-485 port : Z/F control etc.
	Edge storage	Micro SD/SDHC/SDXC (Max 512GB)
	Color/Material	Body: Gray / Aluminium Head: Gray / Aluminium
	RAL code	White: TBD, Black: TBD
	Dimension	Ø85.7 x 297.9mm
	Weight	1.093 kg