

2M Video Encoder


TCS-3100



제품특징

- 2M 급 FHD 해상도 Codec
- 최대 60fps@1920x1080
- 쿼드 스트리밍 지원(Pri : H.265/H.264, Sec x3 : H.265/H.264/MJPEG)
- GIGABIT 이더넷 지원(Ethernet 10/100/1000 Base-T)
- Audio Embedded in HDMI

외관도

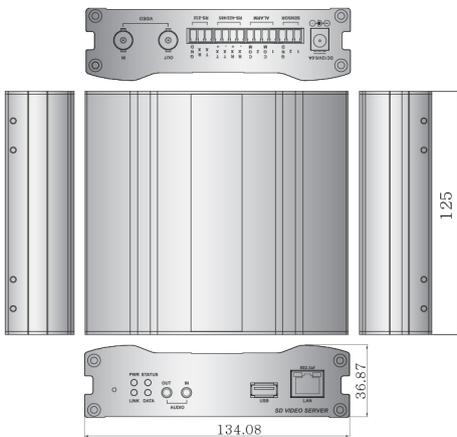

System	System mode	Encoder	
Video	Compression	H.264 / MJPEG	
	Framerate	Max 60fps @ 1920x1080	
	Bitrate	Primary: 32Kbps ~ 16Mbps, Secondary: 32Kbps ~ 4Mbps	
	Resolution	320x240 ~ 1920x1080	
	Streaming	Quad Streaming / Primary : H.264, Secondary x 3 : H.264/MJPEG	
	Burn-in OSD	Multi-lingual: (English, Korean, French, German, Spanish, Italian, Russian, Japanese, Swedish, Portuguese, Dutch, Hungarian, Finnish, Special Symbols)	
	Input	1 x HDMI (Type A), 1 x 3G-SDI (BNC)	
Audio	Output	1 x HDMI type A, Input Bypass, 1 x 3G-SDI (BNC), Input Bypass	
	Compression	G.711 / AAC(Optional)	
	Sample rate	G.711 : 8 KHz, AAC(Optional) : 32 kHz / 44.1 kHz / 48 kHz	
	Bitrate	G.711 : 64Kbps, AAC(Optional) : 64Kbps/128Kbps	
	Streaming	Full duplex	
	Input	1 x Line-In (stereo, mini-stereo type)	
Network	Output	1 x Line-Out (stereo, mini-stereo type)	
	Interface	Ethernet 10/100/1000base-T (RJ-45)	
	Protocol	IPv4/v6, TCP, UDP, IGMP(Multicast), ICMP, DHCP, HTTP, HTTPS, RTP, RTSP, FTP, SNMP, SMTP, UPnP, WS-Discovery, Zero Configuration, NTP, DDNS	
	Security	Password protection, IP address filtering, HTTPS encryption	
	Application programming Interface	Truen protocol/SDK, ONVIF, PSIA, MPEG-TS	
Event and Alarm	Event sources	Motion, Sensor input, Video loss, Client disconnection	
	Event actions	Notification(E-mail), FTP, PTZ preset, Alarm control, Recording	
General	Housing	Aluminum	
	Certifications	KC, CE, FCC	
	External devices		2 x Sensor-In (dry contact, NO/NC)
			2 x Alarm-Out (dry contact, NO)
			1 x RS-232 port
			1 x RS-422/485 port
	Edge storage	1 x Buzzer (88dB min)	
	Recommend power supply	1 x USB 2.0 port	
	Power consumption	Min DC12V/1.0A PoE(Power over Ethernet): 802.3af	
	Operating temp	DC12V/PoE : Max 9.6W	
Storage condition	-20°C ~ 70°C / Less than 90% RH		
Dimension	-50°C ~ 60°C / Less than 95% RH		
Edge storage	134.08(W) X 125.5(D) X 36.87(H)mm		
	470g		